


Gate Access Surge Protection



DTK-120SLR Features & Specs

- Protects 120VAC single phase circuits up to 20 Amps
- Series-connected design for fast response time & maximum protection
- Load removal feature disconnects power to equipment if compromised
- UL 1449 Type 2 SPD with UL 1283 noise filtering

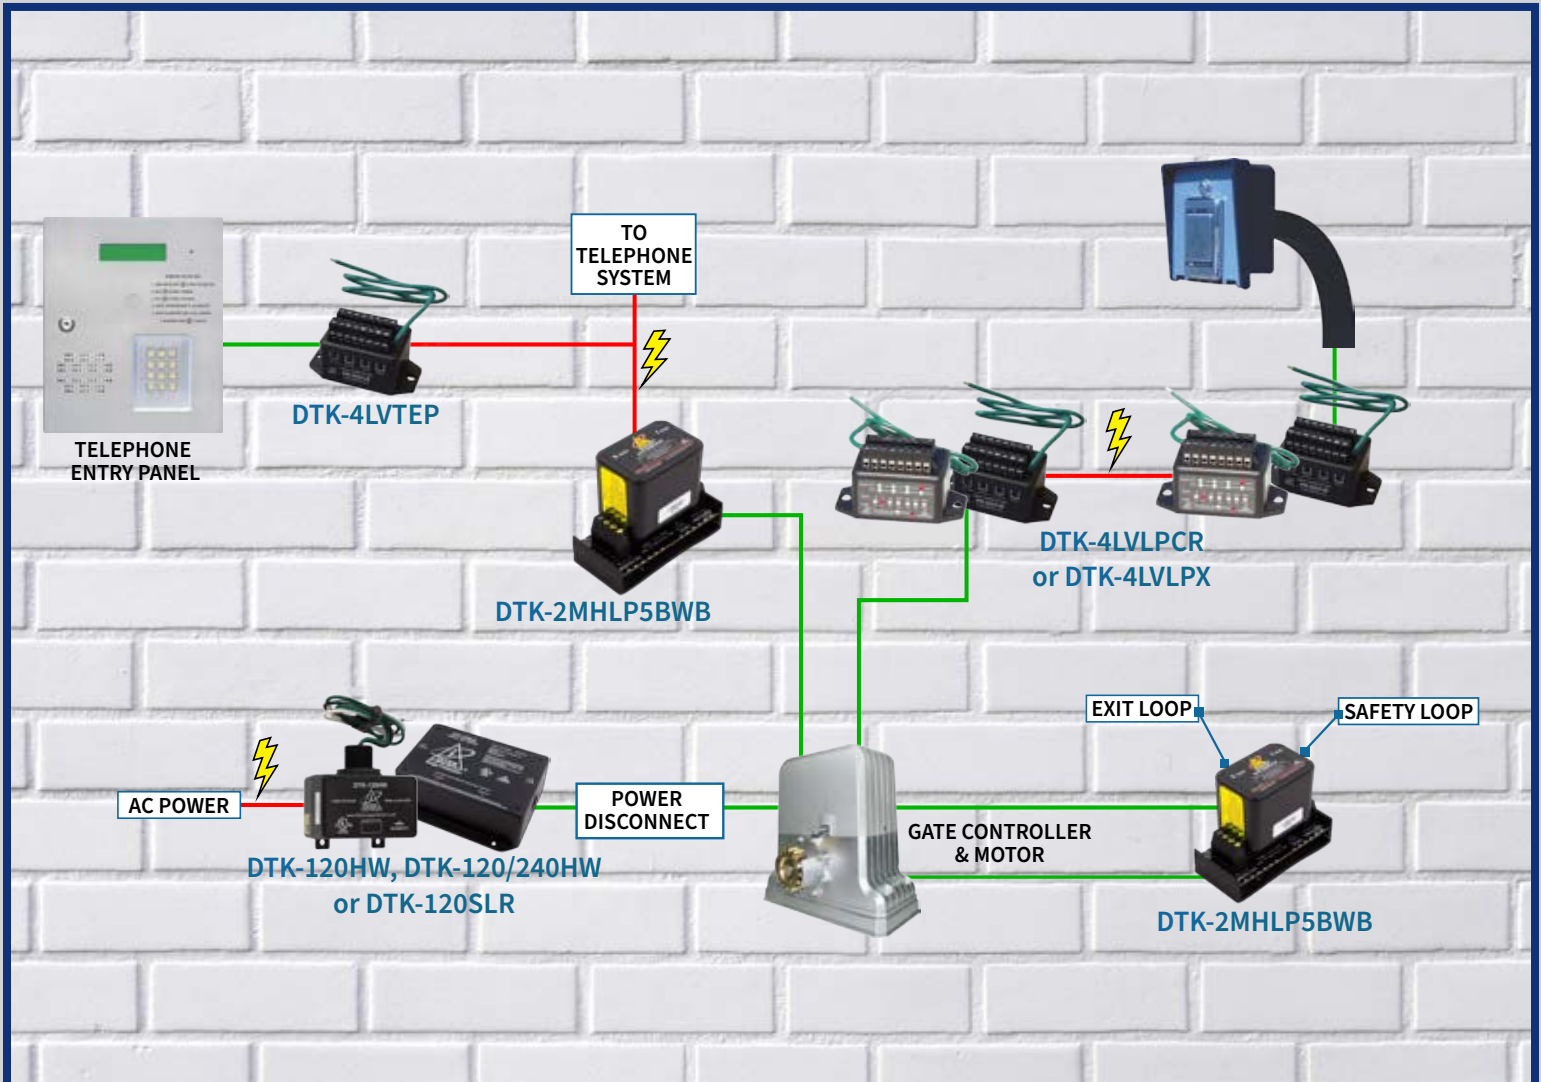

DTK-4LV Series Features & Specs

- **DTK-4VLPCR:** Protects 12V or 24V power, 5V data & LED connections
- **DTK-4VLXP:** Protects up to (4) pairs of 0-12V power & data connections
- **DTK-4LVTEP:** Protects entry system power, telco & door release circuits



DTK-HW Series Features & Specs

- UL 1449 Type 1 SPD, CSA C22.2 No. 269.1-17
- Approved for 20A circuit breakers
- NEMA 4X enclosure for harsh environments
- Diagnostic LED
 - **DTK-120HW:** 120VAC single phase (2W + G)
 - **DTK-120/240HW:** 120/240VAC split phase (3W + G)



DTK-2MHL5BWB Features & Specs

- 2-pair, 5V exit & safety loop circuit surge protector with hardwired base
- Hybrid design utilizing SAD & GDT technologies
- Field-replaceable protection modules
- 20kA surge current rating

