

DITEK Corporation ONE DITEK CENTER 1720 Starkey Road Largo, FL 33771

INSTALL INSTRUCTIONS

D50-2401, D50-240HW

NOTICE: This SPD should be installed by a licensed contractor in accordance with all applicable National and Local Electrical Codes and the following instructions.

APPLICATION


Type 1 SPD for hardwired installation on a 240 VAC single phase electrical service.

INSTRUCTIONS:

Caution: Measure all voltages to verify applied voltage does not exceed the voltage rating of the unit. Reference the Expected System Voltages chart below. Improper installation voids the warranty.

NOTE: Suitable for use on a circuit capable of delivering not more than 100,000 rms symmetrical Amperes. Recommended circuit breaker size is 20 Amps. This SPD contains no serviceable parts.

- 1. Turn off the power at the main breaker or service disconnect before beginning installation.
- 2. Remove front cover from the electrical panel.
- 3. Determine the ideal mounting position of the SPD by orienting the unit as close as possible to the position of the circuit breaker selected for the SPD connection.
- 4. Remove a 3/4" knockout in the electrical panel or drill a 3/4" NPT hole in the electrical panel.
- 5. Feed all wires through the knockout hole in the panel and tighten the included 3/4" locknut to the SPD fitting.
- 6. Connect the Ground wire (Green) to the Ground bus inside of the panel.
- 7. Connect the Neutral wire (White) to the Neutral bus inside of the panel.
- 8. Connect the Phase wire (Black) to the load side of the single pole circuit breaker.
- 9. If desired, secure the enclosure with appropriate anchors by using the mounting feet on the SPD enclosure.
- 10. After all connections have been made and no hazards exist, replace panel cover and restore power.

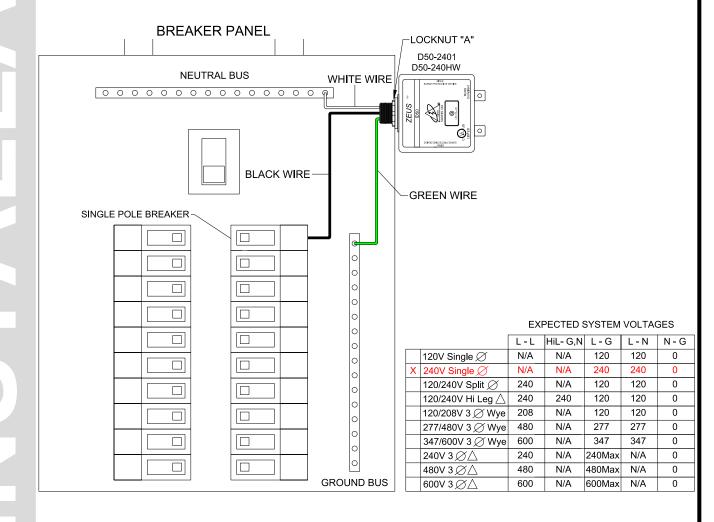

DRAWN BY: BRIAN AYCOCK 12/13/23 APPROVED BY: MIKE MOLINARI 12/13/23 DITEK TECHNICAL SUPPORT 1-888-472-6100 www.diteksurgeprotection.com

DOC # INT-100134-001 PART NO. 191566 REV. 5