



DTK-MRJ45 Series

Low Voltage RJ45 Surge Protector

DITEK's **DTK-MRJ45 Series** protects vital data and communication circuits from surge-induced damage. Convenient RJ45 connections protect four voice, data or signal pairs. MRJ45 Series surge protectors are easily installed at a building's incoming entry and at the equipment being protected.



PRODUCT FEATURES

- Hybrid design utilizing TVS diode and GDT technologies for optimal protection
- Protects all four pairs
- RJ45 female connections with external grounding screw
- Multiple voltage configurations available
- "WP" suffix indicates product includes a 3' RJ45 patch cable

APPLICATIONS

- Central Office Lines
- Building-to-Building Runs
- Station Lines
- Low Voltage RS485 Data
- P.O.T.S. Lines

ACCESSORIES

- DIN Rail Mounting Kit, P/N DTK-DRK

TECHNICAL SPECIFICATIONS

DTK-MRJ45	X	LV	OPX	RUV
Service Voltage:	12Vdc	24Vdc	48Vdc	130Vdc
MCOV:	18V	33V	64V	140V
Clamping Voltage:	22V	39V	76V	155V
Protection Modes:	Differential Mode (Line-Line) Common Mode (Line-Ground)			
Surge Current Rating:	20kA per pair			
Max. Continuous Current:	3 amps			


DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345
Diteksurgeprotection.com • SPS-100042-002 Rev 10 04/26





DTK-MRJ45 Series

Low Voltage RJ45 Surge Protector

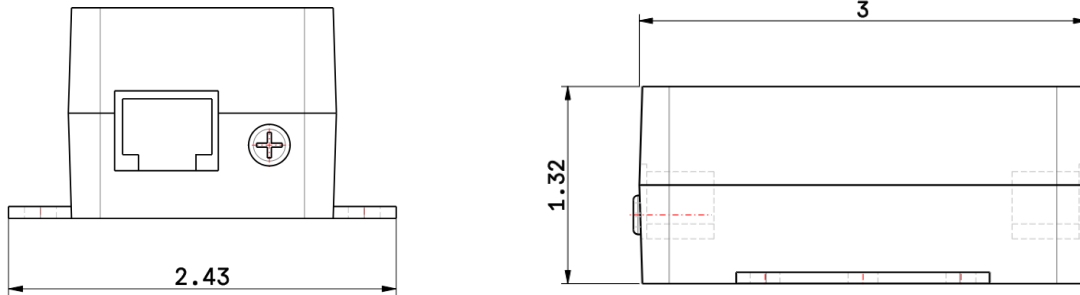

MECHANICAL SPECIFICATIONS

Connection Method:	RJ45 Female In/Out
Housing:	ABS
Operating Temperature:	-40°F – 158°F (-40°C – 70°C)
Maximum Humidity:	95% non-condensing
Dimensions:	3.0 in. L x 2.43 in. W x 1.32 in. H (76 mm x 62 mm x 34 mm)
Weight:	3.2 oz (91g)

SAFETY STANDARDS AND CERTIFICATIONS

Certifications:	UL 497B
Standards Compliance:	RoHS
Warranty:	10 Year Limited Warranty

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345
 Diteksurgeprotection.com • SPS-100042-002 Rev 10 04/26



Every precaution has been taken to ensure that this is accurate and complete. DITEK Corporation assumes no responsibility and disclaims all liability for damages resulting from the use of this information or for any errors or omissions.