



# DTK-MRJPOE

Power over Ethernet Surge Protector

DITEK's **DTK-MRJPOE** protects circuits that use state-of-the-art Power over Ethernet technology. This point of use surge protector is compatible with Cat5e, Cat6 or Cat6A cabling infrastructure and can be installed either at the endpoint device or ahead of power sourcing equipment. Its multi-stage, hybrid design provides superior protection for PoE applications.



## PRODUCT FEATURES

- Hybrid design utilizing TVS diode and GDT technologies for optimal protection
- Supports Ethernet speeds up to 10GbE without signal degradation
- RJ45 female connections with external grounding screw
- Complies with all IEEE Power over Ethernet standards
- UL 497B listed

## APPLICATIONS

- PoE IP Camera, NVR's
- Wireless Access Points
- Audio/Video Touch Pads and Screens
- Access Control
- PoE Lighting

## ACCESSORIES

- DIN Rail Mounting Kit, P/N DTK-DRK

## TECHNICAL SPECIFICATIONS

Service Voltage:	<60Vdc
Protection Modes:	Differential Mode (Line-Line) Common Mode (Line-Ground)
Clamping Voltage:	Differential Mode: 7.22V Common Mode: 75V
Surge Current Rating:	20kA per pair
Power Handling:	144 watts
Data Rate:	10GbE

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345  
Diteksurgeprotection.com • SPS-100042-001 Rev 25 04/26







# DTK-MRJPOE

Power over Ethernet Surge Protector

IEEE PoE STANDARD	WATTAGE	COMPATIBLE
802.3af	15.4 W	Yes
802.3at	30 W	Yes
802.3bt Type 3	60 W	Yes
802.3bt Type 4	100 W	Yes

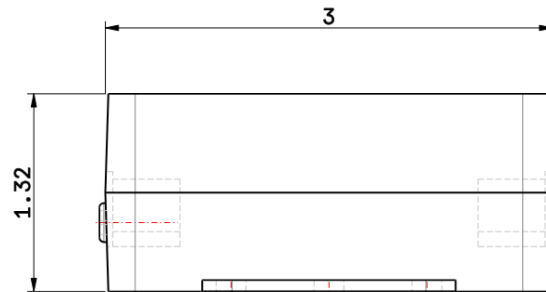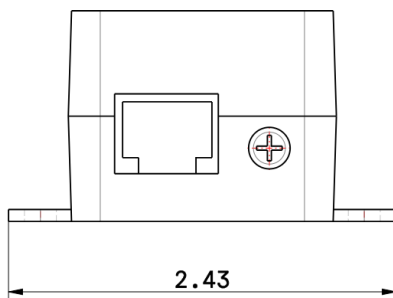

MECHANICAL SPECIFICATIONS	
Connection Method:	RJ45 Female In/Out
Housing:	ABS
Operating Temperature:	-40°F – 158°F (-40°C – 70°C)
Maximum Humidity:	95% non-condensing
Dimensions:	3.0 in. L x 2.43 in. W x 1.32 in. H (76 mm x 62 mm x 34 mm)
Weight:	3.2 oz (91g)

SAFETY STANDARDS AND CERTIFICATIONS	
Certifications:	UL 497B
Standards Compliance:	ANSI/TIA-568, RoHS
Warranty:	10 Year Limited Warranty

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345  
 Diteksurgeprotection.com • SPS-100042-001 Rev 25 04/26

