



DTK-TSS2NM

Total Surge Solution for Fire Alarm Systems



DITEK's DTK-TSS2NM provides a total surge protection solution for addressable and conventional alarm systems. The DTK-TSS2NM is equipped with a DTK-120SRD to protect 120Vac system power and has space available for inserting low voltage surge protection or additional monitoring modules as needed

PRODUCT FEATURES

- 120Vac power surge protection with Form C dry contacts for remote monitoring of surge protection status
- 6.5 in. x 4.5 in. space available for inserting low voltage surge protection modules or additional monitoring modules
- NEMA 4X polycarbonate enclosure for outdoor installations
- 5-position grounding bus included

APPLICATIONS

- Fire Alarm Control Panels
- Industrial Control Panels

TECHNICAL SPECIFICATIONS	
Service Voltage:	120Vac Single Φ
MCOV:	150V
Max. Continuous Current:	20 amps
Surge Current Rating:	50,000A
Nominal Discharge Current Rating (I_n):	10kA
Short Circuit Current Rating (SCCR):	10,000A
Voltage Protection Rating (VPR):	600V Line-Ground 1000V Neutral-Ground 600V Line-Neutral
EMI/RFI Filtering Attenuation:	Up to -35dB, 100kHz – 100MHz
Status Indication:	LED, Form C dry contacts


DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345
Diteksurgeprotection.com • SPS-100005-004 Rev 5 05/26





DTK-TSS2NM

Total Surge Solution for Fire Alarm Systems

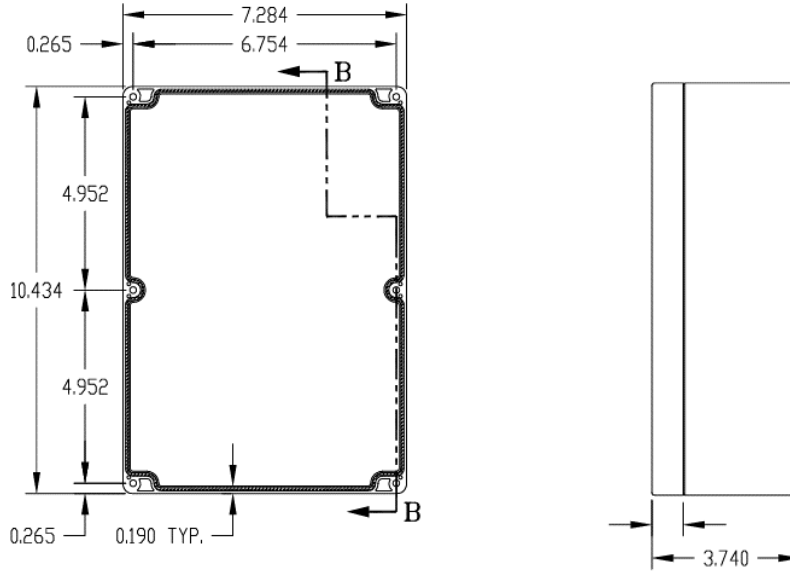

MECHANICAL SPECIFICATIONS

Connection Method:	Mechanical studs 12AWG
Housing:	NEMA 4X polycarbonate
Operating Temperature:	-40°F – 175°F (-40°C – 80°C)
Maximum Humidity:	95% non-condensing
Dimensions:	10.43 in. L x 7.28 in. W x 3.74 in. H (265 mm x 185 mm x 95 mm)
Weight:	2.9 lbs. (1.32kg)

SAFETY STANDARDS AND CERTIFICATIONS

Certifications:	DTK-120SRD UL 1449 5th Edition Type 2CA CSA C22.2 No. 269.4-17, 2017-03 Type 4-2 SPD UL 1283
Standards Compliance:	RoHS
Warranty:	10 Year Limited Warranty