




# DTK-TSS6

Total Surge Solution for Fire Alarm Systems

**DITEK's DTK-TSS6** provides a total surge protection solution for addressable and conventional alarm systems. It protects 120Vac system power and up to eight (8) pairs of SLC, IDC/PIV, NAC or dialer circuits. The TSS6 is equipped with a DTK-120HW for 120Vac surge protection and a DTK-4MB mounting base. Adding DTK-2MHLP modules for data/signal and dialer circuit protection provides a complete solution for your fire alarm system. The DTK-TSS6 includes an NFPA 72 10.6.5.4 compatible lockout kit to prevent accidental disconnect of the fire alarm system.

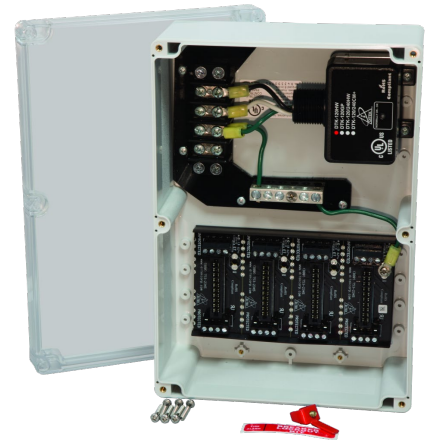

## PRODUCT FEATURES

- 120Vac power surge protection
- 4-position mounting base for 2MHLP modules to protect up to (8) SLC, NAC, IDC, PIV, network or dialer circuit pairs (2MHLP modules must be ordered separately)
- NEMA 4X polycarbonate enclosure for outdoor installations

## APPLICATIONS

- Fire Alarm Control Panels

## PRODUCT CONFIGURATION EXAMPLE


- DTK-TSS6
- DTK-2MHLP24F x 1 – protects (2) SLC circuits
- DTK-2MHLP24B x 2 – protects (4) NAC circuits
- DTK-2MHLP130B x 1 – protects (2) telco lines

TECHNICAL SPECIFICATIONS	
Service Voltage:	120Vac Single $\Phi$
MCOV:	150V
Max. Continuous Current:	20 amps
Surge Current Rating:	50,000A
Nominal Discharge Current Rating ( $I_n$ ):	10kA
Short Circuit Current Rating (SCCR):	10,000A
Voltage Protection Rating (VPR):	700V Line-Ground 1500V Neutral-Ground 700V Line-Neutral
Status Indication:	LED



# DTK-TSS6

Total Surge Solution for Fire Alarm Systems

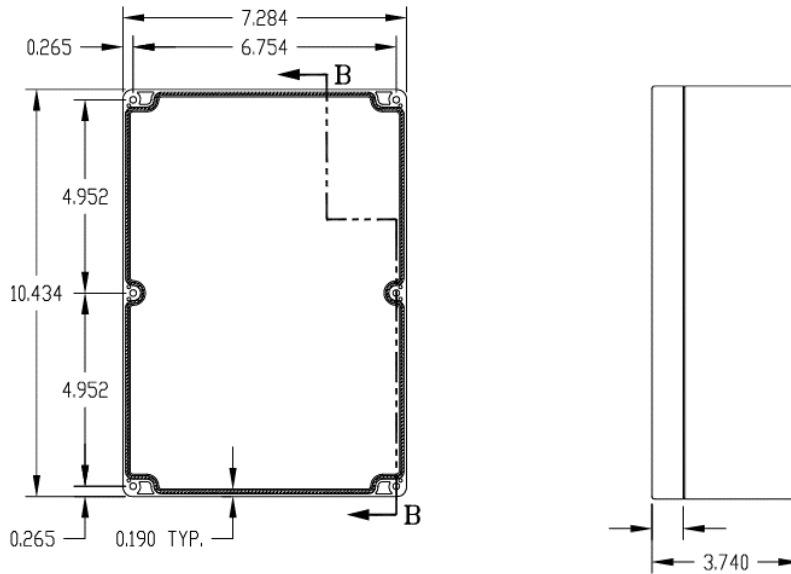

MECHANICAL SPECIFICATIONS	
Connection Method:	DTK-120HW Terminal block 12AWG DTK-4MB Terminal blocks 30-12AWG
Housing:	NEMA 4X polycarbonate
Operating Temperature:	-40°F – 175°F (-40°C – 80°C)
Maximum Humidity:	95% non-condensing
Dimensions:	10.43 in. L x 7.28 in. W x 3.74 in. H (265 mm x 185 mm x 95 mm)
Weight:	2.9 lbs. (1.32kg)

SAFETY STANDARDS AND CERTIFICATIONS	
Certifications:	<b>DTK-120HW</b> UL 1449 5th Edition Type 2 SPD CSA C22.2 No. 269.1-17, 2017-02 Type 1 SPD <b>DTK-2MHLP Series Modules</b> UL 497B
Standards Compliance:	RoHS
Warranty:	10 Year Limited Warranty

