



Versa-Module 2 Series

Versatile Modular Surge Protection System

DITEK's Versa-Module 2 Series is a unique, modular solution for protecting various combinations of signaling, data and low voltage power circuits. With the option of 4, 8 and 24 channel enclosures, the VM2 Series offers a vast array of customizable solutions for every application. Its rapid-replacement modules, available in both RJ45 and screw terminal configurations, and single point grounding simplifies installation and service replacement.



PRODUCT FEATURES

- Rapid-replacement modular system with single point ground
- Enclosures and modules sold separately, allowing you to “build your own” protection solution that accommodates various circuit types
- Hybrid design utilizing TVS diode and GDT technologies
- Modules available in both RJ45 (VM2) and screw terminal (VM2T) configurations
- Enclosures also accept DTK-NETMS and DTK-EXTMS protection modules

APPLICATIONS

- 24V PoE Systems
- Access Control
- 70V Audio Systems
- Home Automation
- Low Voltage Power Circuits

ENCLOSURES

- DTK-VM2W4 – 4 channel (2 blank plates incl)
- DTK-VM2W8 – 8 channel (4 blank plates incl)
- DTK-VM2R24 – 24 channel (12 blank plates incl)

ACCESSORIES

- DTK-VM2BLPK – 4 pack blank plates

TECHNICAL SPECIFICATIONS							
DTK-VM2 or DTK-VM2T	M5	M12	M24	M36	M48	M75	M130
Service Voltage:	5Vdc	12Vdc	24Vdc	36Vdc	48Vdc	75Vdc	130Vdc
MCOV:	6V	24V	33V	48V	64V	90V	140V
Clamping Voltage:	8V	31V	39V	59V	76V	108V	155V
Protection Modes:	Differential Mode (Line-Line) Common Mode (Line-Ground)						
Surge Current Rating:	20kA per pair						
Max. Continuous Current:	3 amps (VM2) 5 amps (VM2T)						
Failure Mode:	Short to ground						

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345
 Diteksurgeprotection.com • SPS-100089-002 Rev 5 04/26




Every precaution has been taken to ensure that this is accurate and complete. DITEK Corporation assumes no responsibility and disclaims all liability for damages resulting from the use of this information or for any errors or omissions.



Versa-Module 2 Series

Versatile Modular Surge Protection System

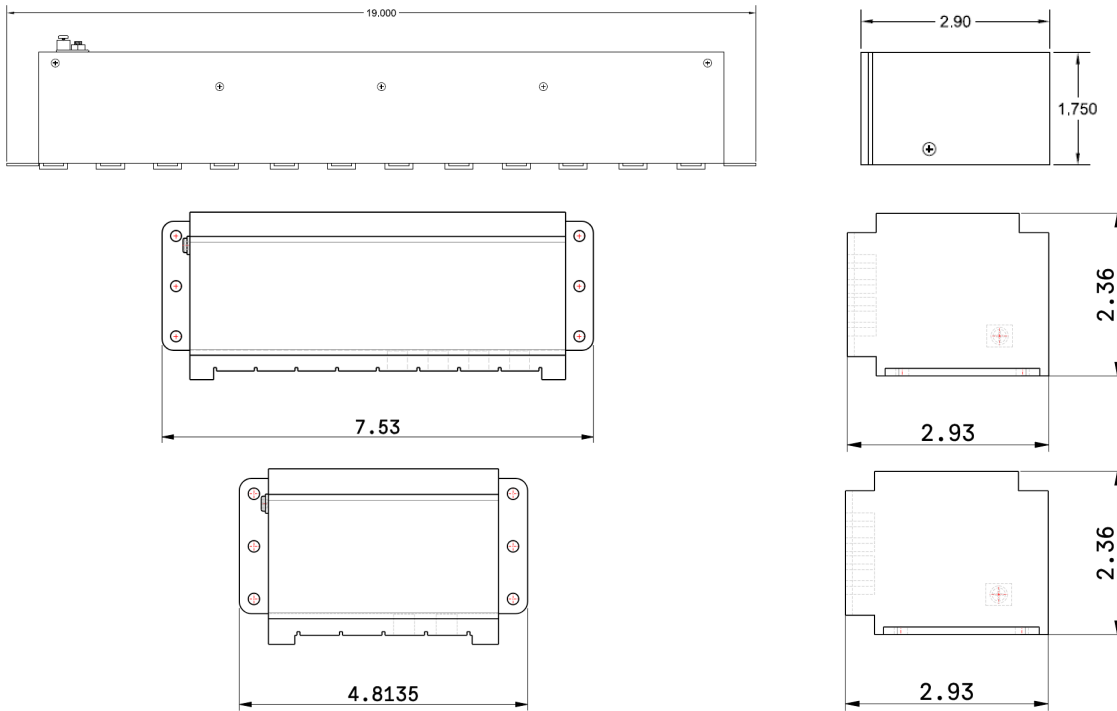

MECHANICAL SPECIFICATIONS

Connection Method:	DTK-VM2 Shielded RJ45 Female In/Out DTK-VM2T Screw terminals, 2 pair, 30-14AWG
Housing:	DTK-VM2R24 Galvanized Steel DTK-VM2W8 ABS DTK-VM2W4 ABS
Operating Temperature:	-40°F – 158°F (-40°C – 70°C)
Maximum Humidity:	95% non-condensing
Dimensions:	DTK-VM2R24 19 in. L x 2.9 in. W x 1.77 in. H DTK-VM2W8 7.53 in. L x 2.93 in. W x 2.36 in. H DTK-VM2W4 4.81 in. L x 2.93 in. W x 2.36 in. H
Weight:	DTK-VM2R24 3.0 lbs. (1.36kg) DTK-VM2W8 9.6 oz. (272g) DTK-VM2W4 5.9 oz. (167g)

SAFETY STANDARDS AND CERTIFICATIONS

Certifications:	UL 497B
Standards Compliance:	RoHS
Warranty:	10 Year Limited Warranty

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345
Diteksurgeprotection.com • SPS-100089-002 Rev 5 04/26

