



# DTK-DRF Series

Low Voltage DIN Rail Surge Protectors

DITEK's **DTK-DRF Series** of low voltage DIN Rail surge protectors provide robust protection in a compact package. This series offers high-performance surge protection for critical low voltage applications within industrial and commercial environments, and incorporates a removable protection module for easy serviceability.



## PRODUCT FEATURES

- Protects (2) low voltage circuit pairs
- Hybrid design utilizing TVS diode and GDT technologies
- Field-replaceable protection module
- 35mm DIN Rail mounting configuration
- Connection to ground via grounded DIN rail or the included grounding lug

## APPLICATIONS

- Industrial Control Panels
- UL508 Panel Manufacturing
- 4-20mA Current Loops
- Low Voltage Power Circuits
- RS485 Data Circuits

## ACCESSORIES

- Replacement Module – Add “M” suffix to P/N

TECHNICAL SPECIFICATIONS							
DTK-DR	5F	12F	24F	36F	48F	75F	130F
Service Voltage:	5Vdc	12Vdc	24Vdc	36Vdc	48Vdc	75Vdc	130Vdc
MCOV:	6V	18V	33V	48V	64V	90V	140V
Clamping Voltage:	8V	22V	39V	57V	76V	108V	155V
Protection Modes:	Differential Mode (Line-Line) Common Mode (Line-Ground)						
Surge Current Rating:	20,000A						
Max. Continuous Current:	1 amp						
Failure Mode:	Open circuit						



DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345  
 Diteksurgeprotection.com • SPS-100094-003 Rev 7 04/26





# DTK-DRF Series

Low Voltage DIN Rail Surge Protectors

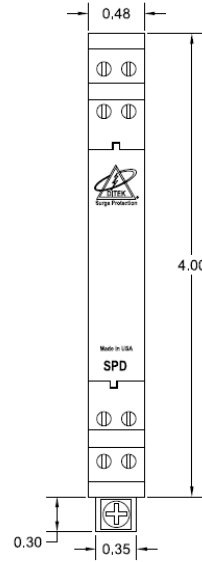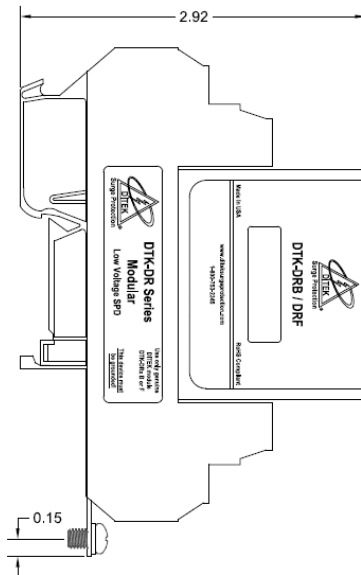

## MECHANICAL SPECIFICATIONS

Connection Method:	Screw terminals 30-12AWG
Mounting Method:	35mm DIN rail
Housing:	ABS, UL94-V0, IP20
Operating Temperature:	-40°F – 158°F (-40°C – 70°C)
Maximum Humidity:	95% non-condensing
Dimensions:	4.0 in. L x 0.48 in. W x 2.92 in. H (102 mm x 12 mm x 74 mm)
Weight:	3.2 oz (91g)

## SAFETY STANDARDS AND CERTIFICATIONS

Certifications:	UL 497B
Standards Compliance:	RoHS
Warranty:	10 Year Limited Warranty

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345  
 Diteksurgeprotection.com • SPS-100094-003 Rev 7 04/26



Every precaution has been taken to ensure that this is accurate and complete. DITEK Corporation assumes no responsibility and disclaims all liability for damages resulting from the use of this information or for any errors or omissions.