



# D200MT Series

200kA Modular Type 1 Surge Protective Device w/ Integral Disconnect



**DITEK's D200MT Series Industrial Surge Protectors** with integral disconnect switch are designed to provide professional-grade protection to AC power systems in the most demanding environments. Each model provides a high surge current rating to ensure long service life, and includes service assurance features that help alert building management of their current protection status so that managers can take action to maintain continued protection.

## PRODUCT FEATURES

- 200,000 amps per phase surge current rating ensures long service life
- Field-replaceable surge protection module
- Diagnostic LEDs provide MOV health status for each phase
- Surge counter w/ reset, audible alarm and Form C dry contacts for remote monitoring
- EMI/RFI filtering
- Phase loss indication
- UL 98 Integral Disconnect Switch included

## APPLICATIONS

- Switchboard
- Service Entrance
- Distribution Panels

## REPLACEMENT MODULES

- D200M-240SM for P/N D200M-120/2401T
- D200M-208YM for P/N D200M-120/2083YT
- D200M-480YM for P/N D200M-277/4803YT
- D200M-240DM for P/N D200M-2403DT
- D200M-480DM for P/N D200M-4803DT

## TECHNICAL SPECIFICATIONS

Voltage Configurations:	See chart on page 2
Surge Current Rating:	200,000A per phase 100,000A per mode
Short Circuit Current Rating (SCCR):	200,000A
Operating Frequency:	50/60Hz
Status Indication:	LEDs per phase, Surge counter with reset, Audible alarm with disable, Form C dry contacts
EMI/RFI Filtering Attenuation:	Up to -50dB, 10kHz – 100MHz

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345  
Diteksurgeprotection.com • SPS-100099-003 Rev 9 05/26






# D200MT Series

200kA Modular Type 1 Surge Protective Device w/ Integral Disconnect

Part Number	Voltage	Service	MCOV	I <sub>n</sub> Rating	Voltage Protection Rating (VPR)			
					L-L	L-N	L-G	N-G
D200M-120/2401T	120/240Vac	Split $\Phi$ (3w + G)	150V/276V	20kA	1200V	800V	900V	800V
D200M-120/2083YT	120/208Vac	Three $\Phi$ Wye (4w + G)	150V/239V	20kA	1200V	800V	900V	800V
D200M-2403DT	240Vac	Three $\Phi$ Delta (4w + G)	320V/320V	20kA	2000V	N/A	1200V	N/A
D200M-277/4803YT	277/480Vac	Three $\Phi$ Wye (4w + G)	320V/552V	20kA	2000V	1500V	1500V	800V
D200M-4803DT	480Vac	Three $\Phi$ Delta (3w + G)	552V/552V	20kA	4000V	N/A	1800V	N/A

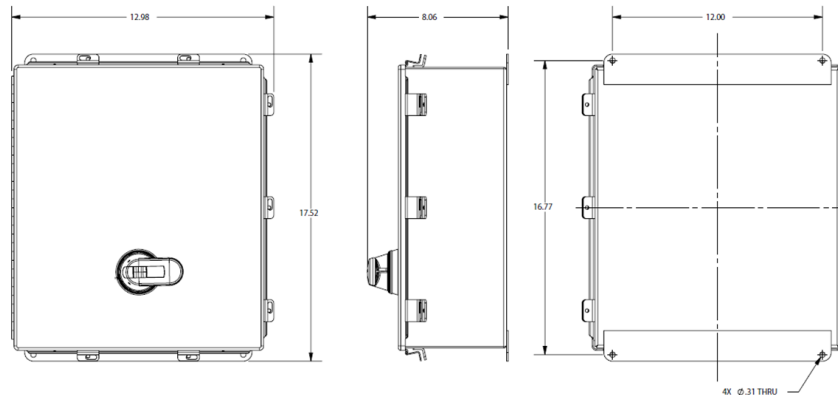

MECHANICAL SPECIFICATIONS	
Connection Method:	Mechanical lugs 8 AWG – 1/0 AWG
Housing:	NEMA Type 4 steel
Operating Temperature:	-31°F – 185°F (-35°C – 85°C)
Maximum Humidity:	95% non-condensing
Dimensions:	12.98 in. L x 17.52 in. W x 8.06 in. H (330 mm x 445 mm x 205 mm)
Weight:	29 lbs. (13.15kg)

SAFETY STANDARDS AND CERTIFICATIONS	
Certifications:	UL 1449 5 <sup>th</sup> Edition Type 1 SPD
Standards Compliance:	RoHS
Warranty:	10 Year Limited Warranty

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345  
 Diteksurgeprotection.com • SPS-100099-003 Rev 9 05/26

