

Residential Protection

A | DTK-120/240BK1

CIRCUIT BREAKER-STYLE – LOAD CENTER

UL 1449 | Type 2 SPD

- Fits multiple load centers w/ 1" spacing
- 50,000A surge current rating
- Audible alarm with silence feature
- Diagnostic LED
- 5 year, \$25,000 connected equipment warranty



B | DTK-120/240HD2

MAIN PANEL, METER OR TRANSFER SWITCH

UL 1449 | Type 1 SPD

- 100,000A/phase surge current rating
- NEMA 4X enclosure
- Diagnostic LED
- Flush mount kit p/n DTK-FMKHD2
- 5 year \$25,000 connected equipment warranty



C | DTK-120/240HD

MAIN PANEL, METER OR TRANSFER SWITCH

UL 1449 | Type 1 SPD

- 50,000A/phase surge current rating
- NEMA 4X enclosure
- Diagnostic LED
- Flush mount version p/n DTK-120/240HDFM
- 5 year, \$10,000 connected equipment warranty



D | DTK-120/240XD

MAIN PANEL, METER OR TRANSFER SWITCH

UL 1449 | Type 1 SPD

- 50,000A/phase surge current rating
- NEMA 4X enclosure
- Diagnostic LED
- Flush mount kit p/n DTK-FMK
- 5 year, \$10,000 connected equipment warranty




National Electrical Code, Article 230.67 stipulates:



All electrical services to dwellings must have surge protective devices installed at or near the service entrance

SPDs "shall be an integral part of the service equipment or shall be located immediately adjacent thereto"

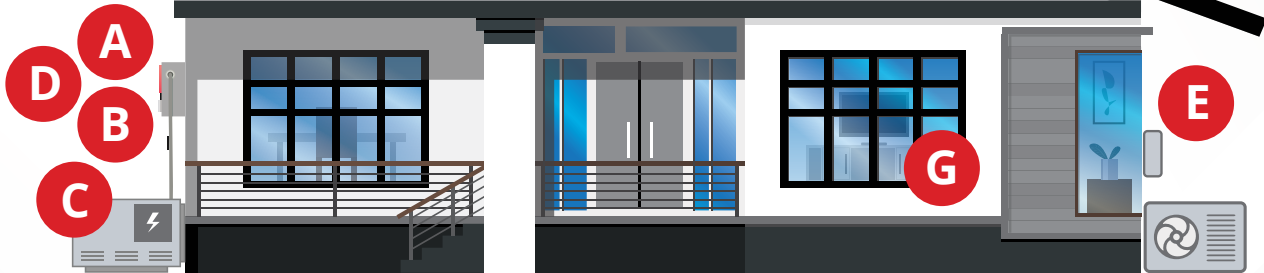

E | DTK-120/240CM+

HVAC & POOL CONTROLS

UL 1449 | Type 1 SPD

- 50,000A total surge current rating
- NEMA 4X enclosure
- Diagnostic LED
- 3/4" NPT male fitting
- 3 year, \$7,500 connected equipment warranty



F | DTK-MRJPOES

ETHERNET & POE CIRCUITS

UL 497B | 20,000A

- Protects 1 Ethernet or PoE channel
- RJ45 female in/out
- Rated to pass up to 10Gbps
- 20kA/pair surge current rating
- 10 year limited warranty



G | DTK-7VS

PLUG-IN SURGE STRIP

UL 1449 | Type 3 SPD

- Power strip with load-sensing technology
- 120VAC, 15A
- 7 outlets with 4' cord
- Illuminated load-status indicator

